

RealValidExam



Try before you buy

Download a free sample of any of our exam questions and answers

- ✓ 24/7 customer support, Secure shopping site
- ✓ Free One year updates to match real exam scenarios
- ✓ If you failed your exam after buying our products we will refund the full amount back to you.


Choose an exam to sample

Select a vendor... ▼

Select an exam... ▼

Your email address

 [Download Now](#)

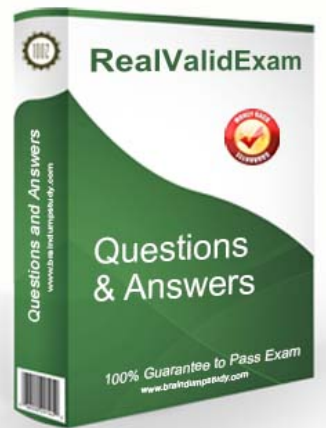

QUALITY AND VALUE

RealValidExam Practice Exams are written to the highest standards of technical accuracy, using only certified subject matter experts and published authors for development - no all dumps.



TESTED AND APPROVED

We are committed to the process of vendor and third party approvals. We believe professionals and executives alike deserve the confidence of quality coverage these authorizations provide. anEdison



EASY TO PASS

If you prepare for the exams using our RealValidExam testing engine, It is easy to succeed for all certifications in the first attempt. You don't have to deal with all dumps or any free torrent / rapidshare all stuff.



TRY BEFORE BUY

RealValidExam offers free demo of each product. You can check out the interface, question quality and usability of our practice exams before you decide to buy.

<http://www.realvalidexam.com>

100% real and valid exam dumps can ensure you pass at the first attempt

Exam : **C2060-218**

Title : IBM Sterling B2B Integrator
V5.2, Solution Implementation

Vendor : IBM

Version : DEMO

NO.1 A developer is implementing onFault logic into a Business Process (BP) for error handling. Based on the following BPML code:

```
<onFault code="No files to collect">  
  <assign name="Assign" to="Results">No file in folder</assign>  
</onFault>
```

Which error will trigger the onFault in the BP?

- A. Any error
- B. XPath error
- C. No file in folder
- D. No files to collect

Answer: D

NO.2 Which XPath expression references a document in process data?

- A. SCIOBJECTID
- B. PrimaryDocument
- C. Document/SCIOBJECTID
- D. PrimaryDocument/@SCIOBJECTID

Answer: D

NO.3 A developer has set up a File System Adapter to monitor a specific folder on the file system.

When a file arrives in the folder, a Business Process (BP) will be executed. Where will the file payload be available to the rest of the BP?

- A. Primary Data
- B. Process Data
- C. Primary Document
- D. Process Document

Answer: C

NO.4 A developer is testing an IBM Sterling B2B Integrator (SBI) Business Process (BP) that was created using the Graphical Process Modeler (GPM). The developer is attempting to extract the Primary Document contained in Process Data to a file system folder using a File System Adapter (FSA). In the File System Adapter Service Editor and/or Service Configuration the developer has assigned values to the parameters for the Action (Extract), extraction folder and for the file name to name the extracted file. However, the process is failing at the FSA with an error indicating that the Primary Document is null or doesn't exist. The developer has verified that the Primary Document does exist. What is the most likely cause of the error?

- A. File System adapter Service Editor tab Message to Service Output Msg set to Messages Only
- B. File System adapter Service Editor tab Message from Service Input Msg set to Allow Message Write
- C. File System adapter Service Editor tab Message from Service Input Msg set to Allow Process Data Write
- D. File System adapter Service Editor tab Message to Service Output Msg set to Obtain Message First, then Process Data
- E. File System adapter Service Editor tab Message to Service Output Msg set to Obtain Process Data

First, then Messages

Answer: A

NO.5 How can a real-time overview of all the defined JDBC pools within a system be viewed?

- A. Threads
- B. System Status
- C. Host Information
- D. Database Usage

Answer: D

NO.6 A developer needs to set a default value if a particular element in Process Data does not exist. Given the following bpmn code, what is the correct corresponding rule?

```
<choice>
  <select>
    <case activity="SetDefaultFileSize" ref="IsFileSizeNotSet?" />
  </select>
  <sequence name="SetDefaultFileSize">
    <assign to="FileSize">0</assign>
  </sequence>
</choice>
```

- A. <rule name="IsFileSizeNotSet?"> <condition>FileSize = 0</condition> </rule>
- B. <rule name="IsFileSizeNotSet?"> <condition>FileSize.length() = 0</condition> </rule>
- C. <rule name="IsFileSizeNotSet?"> <condition>string(/ProcessData/FileSize) = 0</condition> </rule>
- D. <rule name="IsFileSizeNotSet?"> <condition>string-length(/ProcessData/FileSize) = 0</condition> </rule>

Answer: D

NO.7 Which two items can help reduce the size of process data and increase performance? (Choose two.)

- A. Purge Service
- B. Release Service
- C. message_to_child
- D. JVM Max Heap size
- E. Compression Service

Answer: B,C

NO.8 A developer has created and deployed a LWJDBC adapter with only result_name and row_name defined. The developer has opened the configuration setting for this LWJDBC in the Graphic Process Modeler (GPM) and put this into the SQL parameter SELECT * FROM CERTTEST WHERE TEST = O? ?O? Which other parameters need to be configured?

- A. pool, param1
- B. querytype, pool
- C. dbuser, dbpassword
- D. param1, paramtype1, QueryType

Answer: B

NO.9 A developer is creating an IBM Sterling B2B Integrator (SBI) BusinessProcess (BP) using the Graphical Process Modeler (GPM). A Mailbox Delete service is being used to delete a specific message from a mailbox. The developer is assigning the parameter MessageId to delete in the name-value pair in the Service Editor. There are other services being used in the BP that create the XML tag MessageId in Process Data. Which message mode in the GPM Service Editor will be required to ensure that the value of MessageId set in the Service Editor will be used?

- A. Message from Service Input Msg tab: Allow Message Write
- B. Message from Service Input Msg tab: Allow Process Data Write
- C. Message to Service Output Msg tab: Obtain Message First, then Process Data
- D. Message to Service Output Msg tab: Obtain Process Data First, then Messages

Answer: D

NO.10 The system default for the amount of time a Business Process (BP) remains online in the system is set to five days. How can that value be overridden?

- A. Update noapp.properties.
- B. Modify the lifespan setting for a BP.
- C. Update with the Performance Tuning wizard.
- D. Create a new Retention Service configuration.

Answer: B